


Stainless steel manifold for underfloor heating

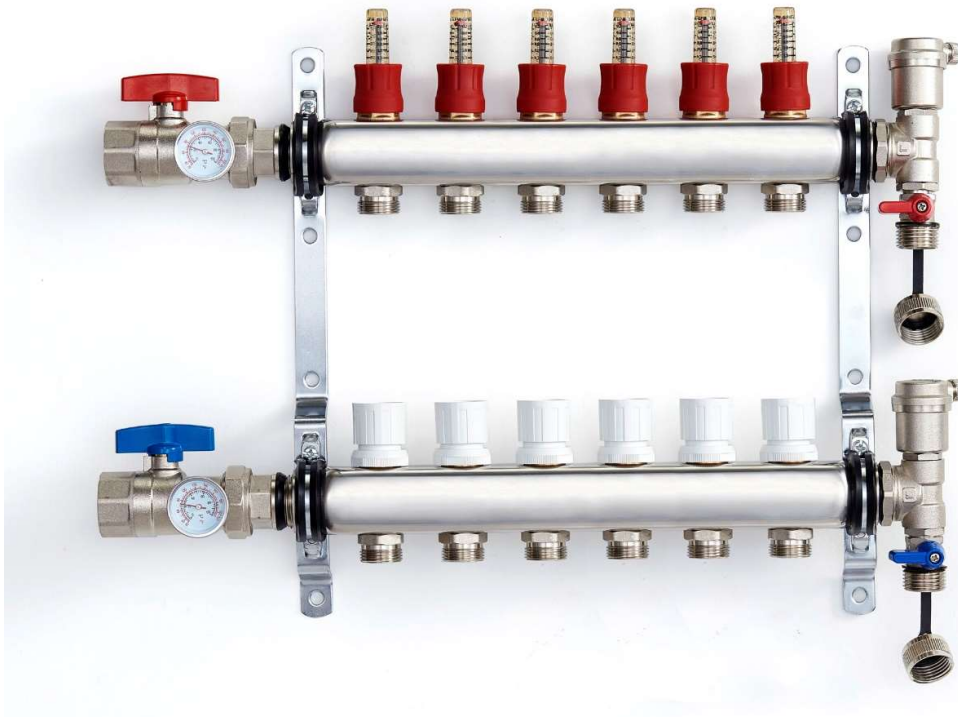

Connections

Supply/return: G1" female
Circuits: 3/4" Eurocone
Distance between circuits: 50 mm
Distance between supply and return body: 210 mm

Flow:

Adjustable flow meters
Indication scale: 0,5 - 5 l/min
Indication tolerance: +/- 10%
KVS value: 1,10

Double adjustable valves
Ball valve with thermometers
Automatic air vents
Fill and drain valves

Working media

Media 1: Water
Media 2: 50% water and 50% ethylene glycol
Media 3: 50% water and 50% propylene glycol

Working performance:

Max. working pressure: 10 bar
Constant permissible temperature: 0°C - 70°C

Type	Article code	Specification	Circuits	Width (mm)	Item EAN code
FN16S-1 F-3/4*2	1100042446	1F-005-3/4EK-02	2	115	5401147755528
FN16S-1 F-3/4*3	1100042447	1F-005-3/4EK-03	3	205	5401147755535
FN16S-1 F-3/4*4	1100042448	1F-005-3/4EK-04	4	255	5401147755542
FN16S-1 F-3/4*5	1100042449	1F-005-3/4EK-05	5	305	5401147755559
FN16S-1 F-3/4*6	1100042450	1F-005-3/4EK-06	6	355	5401147755566
FN16S-1 F-3/4*7	1100042451	1F-005-3/4EK-07	7	405	5401147755573
FN16S-1 F-3/4*8	1100042452	1F-005-3/4EK-08	8	455	5401147755580
FN16S-1 F-3/4*9	1100042453	1F-005-3/4EK-09	9	505	5401147755597
FN16S-1 F-3/4*10	1100042454	1F-005-3/4EK-10	10	555	5401147755603
FN16S-1 F-3/4*11	1100042455	1F-005-3/4EK-11	11	605	5401147755610
FN16S-1 F-3/4*12	1100042456	1F-005-3/4EK-12	12	655	5401147755627

